



COUNTERBALANCE CRANES

PRODUCT CODE: AMCC/APCC/APCCL




Aardwolf Counterbalanced Floor Cranes are designed to pick and carry loads in tight, hard-to-reach areas. Fitted with hard wearing, high capacity nylon front wheels, these counterbalanced floor cranes can pick and carry loads and be pushed on a flat surface to transport materials on solid paved surfaces.

PRODUCT NAME	Manual Counter-balance Crane	Powered Counter-balance Crane	Powered Counter-balance Crane with lateral movement
PRODUCT CODE	AMCC	APCC	APCCL
FEATURES	<ul style="list-style-type: none"> • An integral counter weight. • Max load is 540kg. • Max reach is 1.7m • Maximum lift height is 2.760m. • Folds down for easy transportation 	<ul style="list-style-type: none"> • An integral counter weight. • Max load is 540kg. • Max reach is 1.7m • Maximum lift height is 2.760m. • Folds down for easy transportation. • An ease to operate hydraulically lifted extending boom. 	<ul style="list-style-type: none"> • An integral counter weight. • Max load is 540kg. • Max reach is 1.7m • Maximum lift height is 2.760m. • Folds down for easy transportation. • An ease to operate hydraulically lifted extending boom. • Extra hydraulic cylinder for lateral movement of the front axil.
NET WEIGHT	756 kg	656 kg	830 kg



MANUAL COUNTERBALANCE CRANE

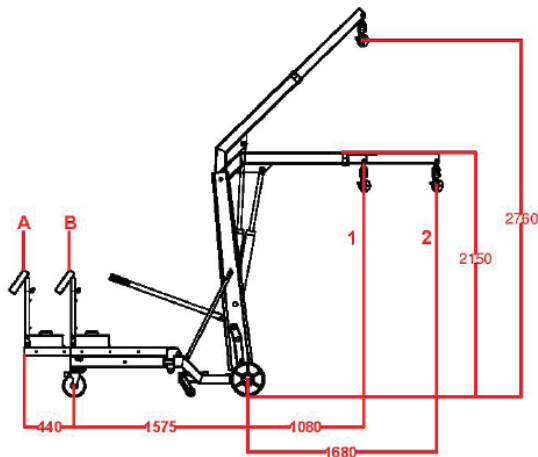

COUNTERWEIGHT OPTIONS	BALANCE POSITIONS	HOOK POSITIONS	LENGTH mm (inch)	CAPACITY kgs (lbs)
400kgs	POS. A	POS. 1	1100 (43")	500 (1102)
		POS. 2	1700 (67")	320 (705)
	POS. B	POS. 1	1100 (43")	400 (882)
		POS. 2	1700 (67")	250 (551)
300kgs	POS. A	POS. 1	1100 (43")	400 (882)
		POS. 2	1700 (67")	250 (551)
	POS. B	POS. 1	1100 (43")	320 (706)
		POS. 2	1700 (67")	200 (441)
200kgs	POS. A	POS. 1	1100 (43")	290 (639)
		POS. 2	1700 (67")	190 (419)
	POS. B	POS. 1	1100 (43")	230 (507)
		POS. 2	1700 (67")	170 (375)
100kgs	POS. A	POS. 1	1100 (43")	190 (419)
		POS. 2	1700 (67")	120 (265)
	POS. B	POS. 1	1100 (43")	150 (331)
		POS. 2	1700 (67")	100 (221)




COUNTER BALANCES CRANE		
Packing dimension	Length	1840mm
	Width	860mm
	Height	930mm
Overall dimension	Length	3750mm
	Width	1980mm
	Height	2800mm
Wheel	Load wheel diameter	300mm
	Driving wheel diameter	200mm

POWERED COUNTERBALANCE CRANES

COUNTERWEIGHT OPTIONS	BALANCE POSITIONS	HOOK POSITIONS	LENGTH mm (inch)	CAPACITY kgs (lbs)
400kgs	POS. A	POS. 1	1100 (43")	540 (1191)
		POS. 2	1700 (67")	350 (772)
	POS. B	POS. 1	1100 (43")	440 (970)
		POS. 2	1700 (67")	290 (639)
300kgs	POS. A	POS. 1	1100 (43")	440 (970)
		POS. 2	1700 (67")	280 (617)
	POS. B	POS. 1	1100 (43")	360 (794)
		POS. 2	1700 (67")	230 (507)
200kgs	POS. A	POS. 1	1100 (43")	340 (750)
		POS. 2	1700 (67")	210 (463)
	POS. B	POS. 1	1100 (43")	280 (617)
		POS. 2	1700 (67")	180 (397)
100kgs	POS. A	POS. 1	1100 (43")	230 (507)
		POS. 2	1700 (67")	150 (331)
	POS. B	POS. 1	1100 (43")	200 (441)
		POS. 2	1700 (67")	130 (287)



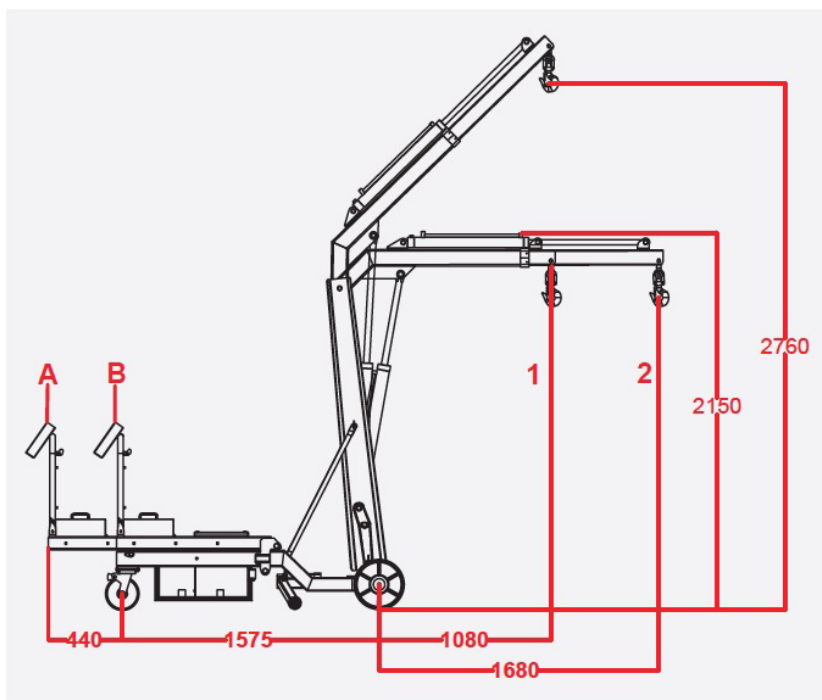

COUNTERBALANCE CRANE

Lifting speed (mm/s)		≥ 50
Lowring speed (mm/s)		Controllable
Lifting motor		12V / 1600W
Battery		12V / 150Ah
Charge (Input / Output)		220V / 12V
Packing dimension	Length	1840mm
	Width	860mm
	Height	930mm
Overall dimension	Length	3750mm
	Width	1980mm
	Height	2800mm
Wheel	Load wheel diameter	300mm
	Driving wheel diameter	200mm



