



GUIL®

MATERIAL LIFTS



MADE IN SPAIN



GUIL® Engineering for Lifting Loads

GUIL is a Spanish manufacturer with over 35 years of experience in the metal industry, specialised in the design and production of Material Lifting Towers for industrial use (for maintenance, installation and construction companies), which are characterised as being highly innovative, efficient and safe.

Our head office is found at our premises in L'Alcúdia, a town that is only 30 km from the region's capital, Valencia (Spain) with more than 5000 m2 for our design and project offices, our prototype and testing workshops, our factory and machinery areas (cutting, welding, painting, assembly etc.), quality control department, warehouse and packing departments, sales and marketing departments and our customer service department.

At the heart of our company is our technical team of engineers who are dedicated to developing lifting towers and wind-up stands of the highest quality and efficiency, and our sales and post-sale staff who offer a fast, competent and professional customer service.

We manufacture over 30 models of lifting towers with compact designs which offer the user a safe and practical option to lift many types of loads. Thanks to this wide range of models and their versatility to be used for so many different tasks along with our adaptors designed for functionality, our towers can be used in numerous fields and are well known for their high quality and durability.

Since 1983 GUIL has experienced a fast and constant evolution and growth, quickly adapting to the ever changing market requirements and continuously improving our manufacturing systems. Thanks to our large distributor network over the 5 continents and our presence at the main national and international trade shows GUIL export just over 89% of their total production to over 90 countries worldwide.

Choose a model and Lift your load

GUIL manufactures Material lifters that offer:

- Maximum stability, safety and resistance. Maximum Safety & Durability
- Timesaving > 100% Productivity
- Lifts of small size – Easy load in vehicles
- Greater manoeuvrability for an easy, safe and convenient Lift operation.
- Fast and easy set-up with no tools required. There are no loose parts
- Compact and lightweight designs for an easy handling. One person operation
- Domestic and industrial applications. Indoor & outdoor uses
- Maximum versatility. A wide range of accessories & adapters available to fulfil all lifting needs
- Portable designs for an easy transportation and storage in small places. Corridor and single-door access
- Sturdy steel base (Epoxy coated for outside uses) with non-marring castors
- Made in Spain – 100 % Service. Availability of all accessories & spare parts!
- Brake winches that lock the load in place when handle/s is/are released.
- Manual winches provided with one or two removable handles for easy lift storage.
- Lifts are equipped with three Safety Systems to guarantee maximum reliability (triple margin of safety).
- Aluminium and steel sturdy but light construction designed to lift, position and install a large variety of materials.
- Reversible forks for added height and get a better load positioning.
- All range of Lifts comply with the European standards guaranteeing maximum safety and resistance.



GUIL - Innovative ideas in Lifting Engineering

Comparative table

ELC MODELS



REFERENCE	Maximum Height	Maximum Load	Height Stowed
ELC-700	3.30 m 10.83 ft	85 Kg 187 lb	1.70 m 5.58 ft
ELC-710	4.00 m 13.12 ft	100 Kg 220 lb	1.65 m 5.41 ft
ELC-720	3.50 m 11.49 ft	125 Kg 276 lb	1.35 m 4.43 ft
ELC-730/R	4.56 m 14.96 ft	125 Kg 276 lb	1.45 m 4.76 ft
ELC-750	4.50 m 14.76 ft	150 Kg 330 lb	1.48 m 4.85 ft
ELC-760	5.40 m 17.72 ft	180 Kg 396 lb	1.82 m 5.97 ft
ELC-770	5.20 m 17.06 ft	250 Kg 551 lb	1.75 m 5.74 ft
ELC-780	5.20 m 17.06 ft	280 Kg 617 lb	1.75 m 5.74 ft

TORO A-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO A-101/C	2.90 m 9.51 ft	170 Kg 375 lb	1.75 m 5.74 ft
TORO A-102/C	4.10 m 13.45 ft	150 Kg 331 lb	1.75 m 5.74 ft

TORO B-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO B-201/C	4.00 m 13.12 ft	250 Kg 551 lb	1.68 m 5.51 ft
TORO B-201 PLUS	5.10 m 16.73 ft	250 Kg 551 lb	1.97 m 6.46 ft
TORO B-202/C	5.15 m 16.90 ft	230 Kg 507 lb	1.68 m 5.51 ft
TORO B-202 PLUS	6.60 m 21.65 ft	230 Kg 507 lb	1.97 m 6.46 ft
TORO B-203/C	6.30 m 20.67 ft	220 Kg 485 lb	1.68 m 5.51 ft

TORO C-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO C-301/C	3.85 m 12.63 ft	340 Kg 750 lb	1.61 m 5.29 ft
TORO C-302/C	5.00 m 16.40 ft	300 Kg 661 lb	1.61 m 5.29 ft
TORO C-303	5.00 m 16.40 ft	320 Kg 705 lb	1.99 m 6.53 ft
TORO C-304/C	6.00 m 19.70 ft	250 Kg 551 lb	1.61 m 5.29 ft
TORO C-305	6.50 m 21.32 ft	320 Kg 705 lb	1.99 m 6.53 ft
TORO C-306	8.00 m 26.25 ft	280 Kg 617 lb	1.99 m 6.53 ft

TORO D-RANGE



REFERENCE	Maximum Height	Maximum Load	Height Stowed
TORO D-401	3.55 m 11.50 ft	440 Kg 970 lb	1.99 m 6.53 ft
TORO D-402/C	3.85 m 12.63 ft	420 Kg 926 lb	1.61 m 5.29 ft
TORO D-403/C	5.00 m 16.40 ft	400 Kg 882 lb	1.61 m 5.29 ft
TORO D-404	5.00 m 16.40 ft	420 Kg 926 lb	1.99 m 6.53 ft
TORO D-405/C	6.00 m 19.70 ft	350 Kg 772 lb	1.61 m 5.29 ft
TORO D-406	6.50 m 21.32 ft	400 Kg 882 lb	1.99 m 6.53 ft
TORO D-407	8.00 m 26.25 ft	350 Kg 772 lb	1.99 m 6.53 ft



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-700	3,30 m 10.83 ft	85 kg 187 lb	1,70 m 5.58 ft	12,8 Kg 28 lb



BC-02/H
Loading platform
80 x 40 cm
(NOT INCLUDED)



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-710	4.00 m 13.12 ft	100 kg 220 lb	1.65 m 5.41 ft	20.5 Kg 45 lb



BC-02/M

Loading platform (80 x 40cm)
(Not included)

R-720

Set of 2 double castors per leg
(1 with brake) for ELC-720
material lift



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-720	3.50 m 11.49 ft	125 kg 276 lb	1.35 m 4.43 ft	23,5 Kg 51.80 lb





Loading platform (80 x 40cm)
(Not included)



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-730/R	4.56 m 14.96 ft	125 kg 276 lb	1.45 m 4.76 ft	37 Kg 82 lb





For adaptors with a
Ø 35 mm spigot.



BC-02/M
Loading platform
80 x 40 cm
(NOT INCLUDED)



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-750	4.50 m 14.76 ft	150 kg 330 lb	1.48 m 4.85 ft	49.5 Kg 109 lb



For adaptors with a
Ø 35 mm spigot.



BC-02/M
Loading platform
80 x 40 cm
(NOT INCLUDED)

REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-760	5.40 m 17.72 ft	180 kg 397 lb	1.82 m 5.97 lb	55 Kg 121 lb



BC-02/M2
Loading platform
80 x 40 cm
(NOT INCLUDED)

For adaptors with a
Ø 50-55 mm spigot.



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-770	5.20 m 17.06 ft	250 kg 551 lb	1.75 m 5.74 lb	89 Kg 196 lb



BC-02/M2
Loading platform
80 x 40 cm
(NOT INCLUDED)

For adaptors with a
Ø 50-55 mm spigot.



REFERENCE	Maximum Height	Maximum Load	Height Stowed	Net Weight
ELC-780	5.20 m 17.06 ft	280 kg 617 lb	1.75 m 5.74 ft	89 Kg 196 lb

ADAPTORS & ACCESSORIES ELC

BC-02 LOADING TRAY-SELF



800 x 400 mm

BC-06 LOADING TRAY-SELF



450 x 450 mm

CPS-01 LEG ADAPTORS



Set of 3 leg adaptors

CPS-02 LEG ADAPTORS



Set of 4 leg adaptors



BC-05 LOADING TRAY-SELF



740 x 435 x 140 mm

Folded Dimensions:
450 x 435 x 150 mm



ALUMINIUM

BC-07 LOADING TRAY-SELF



450 x 435 x 140 mm

Folded Dimensions:
450 x 230 x 150 mm



ALUMINIUM

RD-01 WHEEL ADAPTOR FOR MATERIAL LIFTER

Ref. ELC-730/R



Adaptor with 2 wheels
(Ø 170 mm)

R-710 WHEELS FOR MATERIAL LIFTER Ref. ELC-710



Set of 3 wheels



R-720 WHEELS FOR MATERIAL LIFTER Ref. ELC-720



Set of 4 wheels



FCA-04

ADAPTORS TO RAISE FLOOD LIGHTS



FCA-06



TORO A-Range Material Lifts



	TORO A-101/C	TORO A-102/C
↑	2,90 m 9.51 ft	4,10 m 13.45 ft
kg	170 kg 375 lb	150 kg 331 lb
↓	1,75 m 5.74 lb	1,75 m 5.74 lb
kg	67,5 Kg 149 lb	77.5 Kg 171 lb

TORO A-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS




Auto-brake winches.
CE Machinery Directives




Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevent fishing rod effect

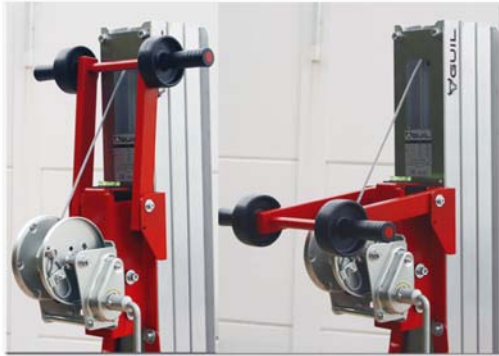

Adjustable manoeuvring handles
with wheels.



Reinforced forks included.
(Detachable). Reversible &
Adjustable design.



2 Stabiliser braces
for greater lift stability.



Adjustable mast blocking
system for horizontal
transportation.



Adjustable base




Large wheels foreasy manoeuvring



COMPACT DESIGNS



TORO A-Range Specifications

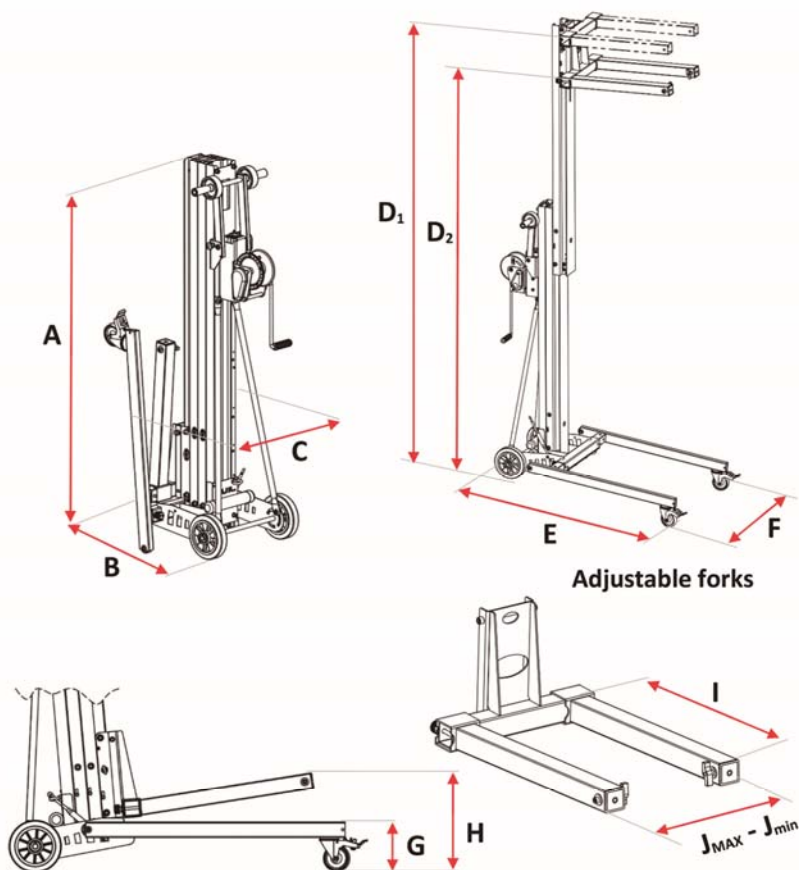

TORO A - Range			TORO A-101/C	TORO A-102/C
STOWED				
Height (cm/ft)	A		175 / 5.7	175 / 5.7
Length (cm/ft)	B		75 / 2.5	75 / 2.5
Width (cm/ft)	C		62 / 2	62 / 2
WORKING MEASUREMENTS				
Maximum height (cm/ft)	Forks up	D ₁	290 / 9.5	410 / 13.4
	Forks down	D ₂	265 / 8.6	380 / 12.5
Length (cm/ft)	E		140 / 4.6	140 / 4.6
Maximum width (cm/ft)	F _{MAX}		79 / 2.6	79 / 2.6
Minimum width (cm/ft)	F _{min}		62 / 2	62 / 2
Leg height (cm/ft)	G		19 / 0.62	19 / 0.62
Load height (cm/ft)	H		33 / 1.1	33 / 1.1
FORKS				
Length (cm/in)	I		66 / 26	66 / 26
Maximum width (cm/in)	J _{MAX}		43 / 16.9	43 / 16.9
Minimum width (cm/in)	J _{min}		30.5 / 12	30.5 / 12
Number of sections			2	3
Maximum load (Kg/lbs)			170 / 375	150 / 331
Weight (Kg/lbs)			67.5/ 149	77.5/ 171



TORO B-Range Material Lifts



	TORO B-201/C	TORO B-201 PLUS	TORO B-202/C	TORO B-202 PLUS	TORO B-203/C
↑	4,00 m 13.12 ft	5,10 m 16.73 ft	5,15 m 16.90 ft	6,60 m 21.65 ft	6,30 m 20.67 ft
↓	250 kg 551 lb	250 kg 551 lb	230 kg 507 lb	230 kg 507 lb	220 kg 485 lb
↓	1,68 m 5.51 ft	1,97 m 6.46 ft	1,68 m 5.51 ft	1,97 m 6.46 ft	1,68 m 5.51 ft
⬇	114 Kg 251 lb	124 Kg 273 lb	124 Kg 273 lb	140 Kg 309 lb	134 Kg 295 lb

TORO B-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS



Auto-brake winch.
CE Machinery Directives



Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring handle
with wheels included.



Reinforced forks included.
(Detachable). Reversible
& Adjustable design.



2 Stabiliser braces for
greater lift stability.



Adjustable mast blocking
system for horizontal trans-
portation.



Spirit level



Folding side legs included

Legs can be inserted in
the front or back of the
tower for positioning close
to walls.



Adjustable legs


Compact designs and 12 wheels included for
easy manoeuvring (Vertically and horizontally)



Ø150 mm adjustable wheels
for perfect levelling.



TORO B-Range Specifications

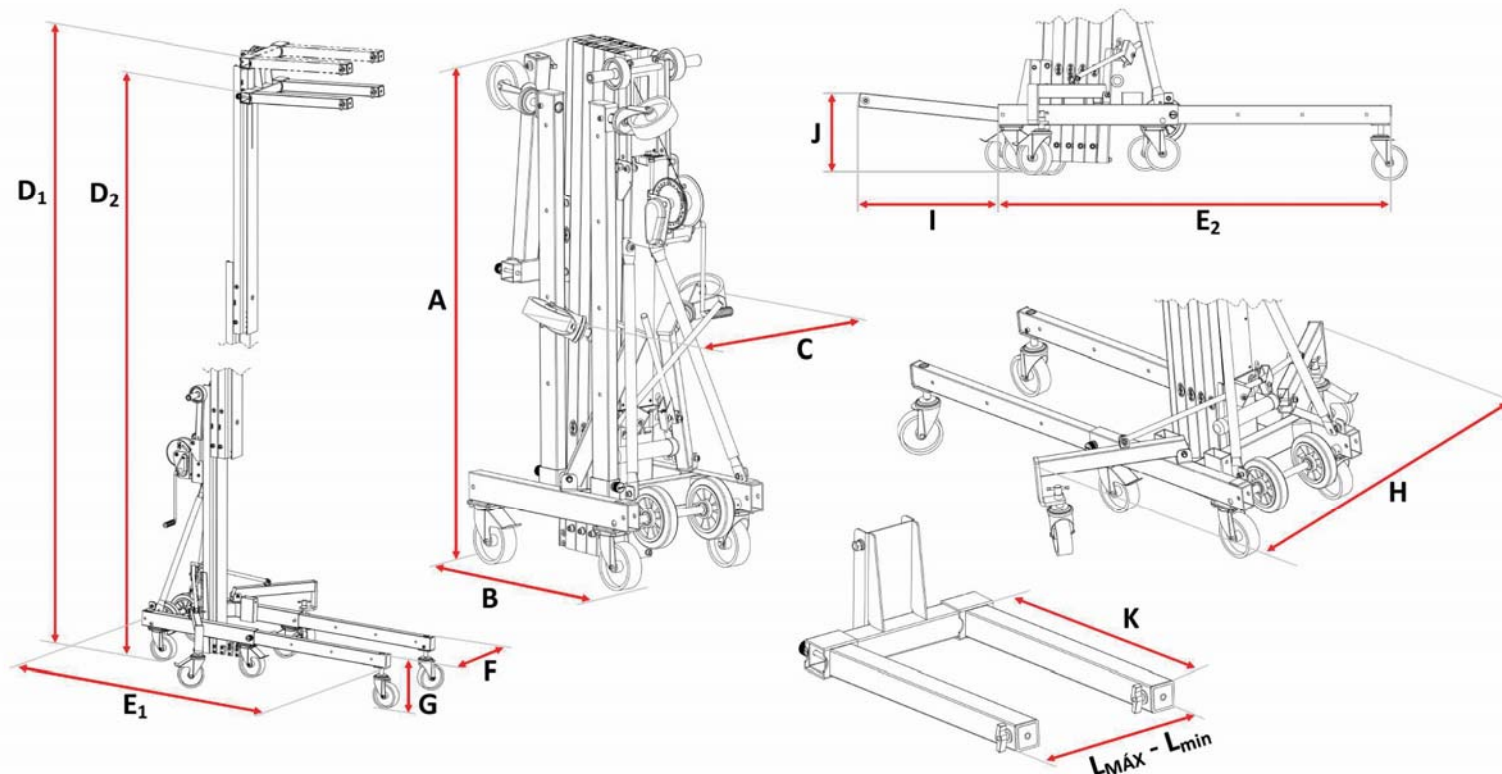

TORO B - Range			TORO B-201/C	TORO B-201 PLUS	TORO B-202/C	TORO B-202 PLUS	TORO B-203/C
STOWED							
Height (cm/ft)	A		168 / 5.5	197 / 6.4	168 / 5.5	197 / 6.4	168 / 5.5
Length (cm/ft)	B		81 / 2.7	81 / 2.7	81 / 2.7	81 / 2.7	81 / 2.7
Width (cm/ft)	C		65 / 2.1	65 / 2.1	65 / 2.1	65 / 2.1	65 / 2.1
WORKING MEASUREMENTS							
Maximum height (cm/ft)	Forks up	D ₁	400 / 13.1	510 / 16.7	515 / 16.9	660 / 21.7	630 / 20.7
	Forks down	D ₂	380 / 12.5	490 / 16.1	495 / 16.2	640 / 21	610 / 20
Length (cm/ft)	Front legs	E ₁	172 / 5.6	172 / 5.6	172 / 5.6	172 / 5.6	172 / 5.6
	Back legs	E ₂	169 / 5.5	169 / 5.5	169 / 5.5	169 / 5.5	169 / 5.5
Width (cm/ft)		F	60 / 2	60 / 2	60 / 2	60 / 2	60 / 2
Leg height (cm/ft)		G	28 / 0.92	28 / 0.92	28 / 0.92	28 / 0.92	28 / 0.92
Width with stabilisers unfolded (cm/ft)		H	138 / 4.5	138 / 4.5	138 / 4.5	138 / 4.5	138 / 4.5
Distance to the wall (cm/ft)		I	57 / 1.9	52 / 1.7	57 / 1.9	52 / 1.7	57 / 1.9
Load height (cm/ft)		J	30 / 1	35 / 1.2	30 / 1	35 / 1.2	30 / 1
FORKS							
Length (cm/in)	K		66 / 26	66 / 26	66 / 26	66 / 26	66 / 26
Maximum width (cm/in)	L _{MAX}		43.5 / 17.1	43.5 / 17.1	43.5 / 17.1	43.5 / 17.1	43.5 / 17.1
Minimum width (cm/in)	L _{min}		29 / 11.4	29 / 11.4	29 / 11.4	29 / 11.4	29 / 11.4
Number of sections			3	3	4	4	5
Maximum load (Kg/lbs)			250 / 551	250 / 551	230 / 507	230 / 507	220 / 485
Weight (Kg/lbs)			114 / 251	124 / 273	124 / 273	140 / 309	134 / 295

TORO C-Range

Material Lifts



	TORO C-301/C	TORO C-302/C	TORO C-303	TORO C-304/C	TORO C-305	TORO C-306
↑	3.85 m 12.63 ft	5.00 m 16.40 ft	5.00 m 16.40 ft	6.00 m 19.70 ft	6.50 m 21.32 ft	8.00 m 26.25 ft
kg	340 kg 750 lb	300 kg 661 lb	320 kg 705 lb	250 kg 551 lb	320 kg 705 lb	280 kg 617 lb
↓	1.61 m 5.29 ft	1.61 m 5.29 ft	1.99 m 6.53 ft	1.61 m 5.29 ft	1.99 m 6.53 ft	1.99 m 6.53 ft
kg	153 Kg 337 lb	166 Kg 366 lb	160 Kg 353 lb	180 Kg 397 lb	178 Kg 392 lb	195 Kg 430 lb

TORO C-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS




Auto-brake winch.
CE Machinery Directives



Internal Pendulum
Brake System (IPB)



Mast Section Unblocking
System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring
handle with Ø200 mm
wheels included.
(3 positions)



Reinforced forks included.
(Detachable). Reversible &
Adjustable design.



2 Stabiliser braces for
greater lift stability.



Adjustable mast blocking
system for horizontal transportation.



Spirit
level

Folding side
legs included

Legs can be inserted in the front or
back of the tower for positioning
close to walls.


Compact designs and 12 wheels included for
easy manoeuvring (Vertically and horizontally)



Ø150 mm adjustable wheels
for perfect levelling.



TORO Serie-C Specifications

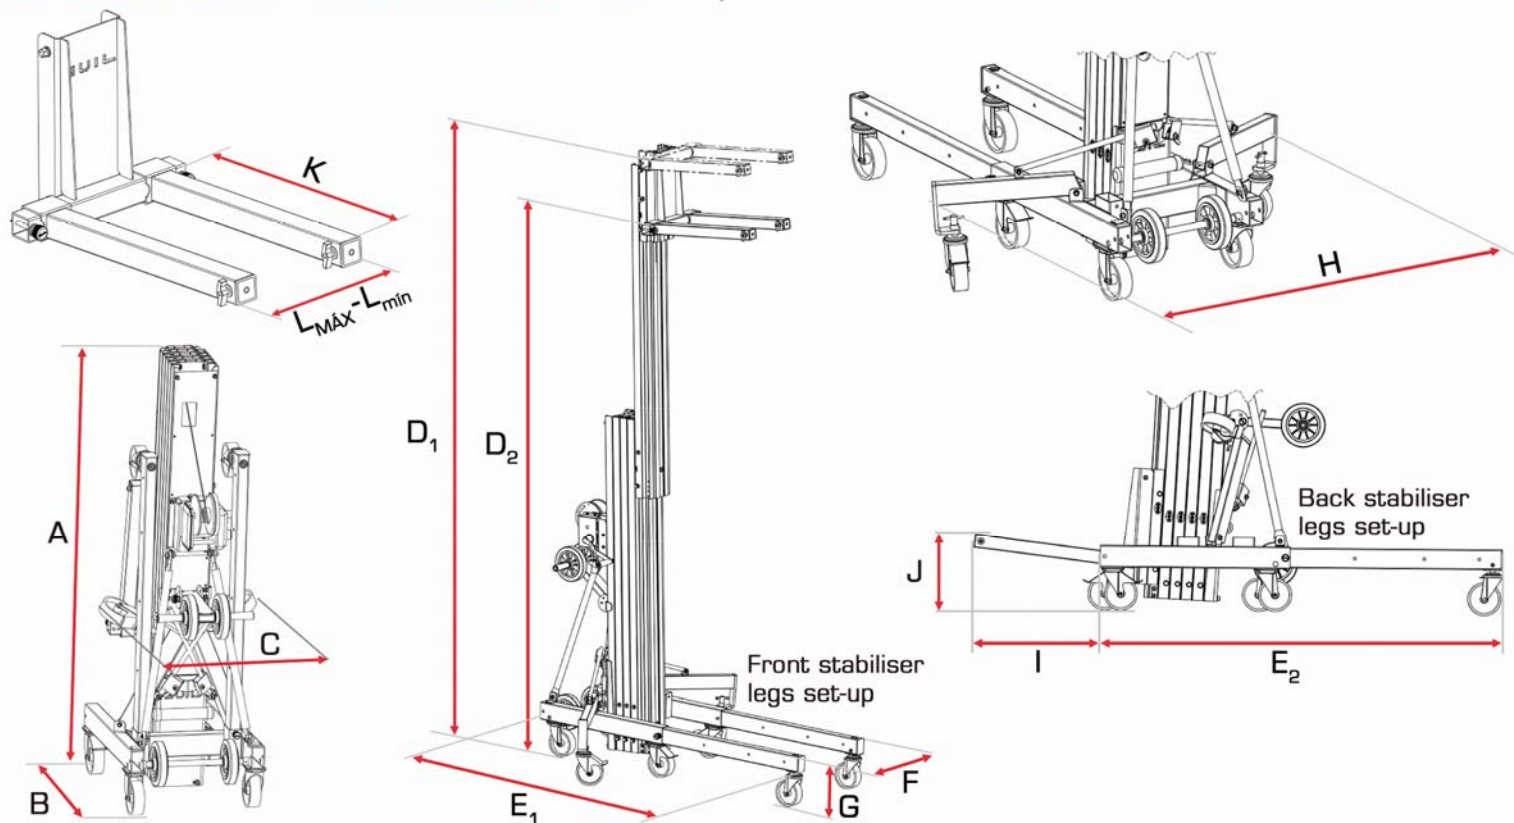

TORO C - Range			TORO C-301/C	TORO C-302/C	TORO C-303	TORO C-304/C	TORO C-305	TORO C-306
STOWED								
Height (cm/ft)	A		161 / 5.3	161 / 5.3	199 / 6.5	161 / 5.3	199 / 6.5	199 / 6.5
Length (cm/ft)	B		95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1
Width (cm/ft)	C		66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1
WORKING MEASUREMENTS								
Maximum height (cm/ft)	Forks up	D ₁	385 / 12.6	500 / 16.4	500 / 16.4	600 / 19.7	650 / 21.3	800 / 26.2
	Forks down	D ₂	343 / 11.3	458 / 15	458 / 15	558 / 18.3	608 / 19.9	758 / 24.9
Length (cm/ft)	Front legs	E ₁	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3
	Back legs	E ₂	183 / 6	183 / 6	183 / 6	183 / 6	183 / 6	183 / 6
Width (cm/ft)		F	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1
Leg height (cm/ft)		G	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9
Width with stabilisers unfolded (cm/ft)		H	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8
Distance to the wall (cm/ft)		I	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9
Load height (cm/ft)		H	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1
FORKS								
Length (cm/in)	K		66 / 26	66 / 26	66 / 26	66 / 26	66 / 26	66 / 26
Maximum width (cm/in)	L _{MAX}		47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7
Minimum width (cm/in)	L _{min}		33.5 / 13.2	33.5 / 13.2	33.5 / 13.2	33.5 / 13.2	33.5 / 13.2	33.5 / 13.2
Number of sections			3	4	3	5	4	5
Maximum load (Kg/lbs)			340 / 750	300 / 661	320 / 705	250 / 551	320 / 705	280 / 617
Weight (Kg/lbs)			153 / 337	166 / 366	160 / 353	180 / 397	178 / 392	195 / 430

TORO D-Range Material Lifts



	TORO D-401	TORO D-402/C	TORO D-403/C	TORO D-404	TORO D-405/C	TORO D-406	TORO D-407
↑	3,55 m 11.50 ft	3,85 m 12.63 ft	5,00 m 16.40 ft	5,00 m 16.40 ft	6,00 m 19.70 ft	6,50 m 21.32 ft	8,00 m 26.25 ft
↕	440 kg 970 lb	420 kg 926 lb	400 kg 882 lb	420 kg 926 lb	350 kg 772 lb	400 kg 882 lb	350 kg 772 lb
↓	1,99 m 6.53 ft	1,61 m 5.29 ft	1,61 m 5.29 ft	1,99 m 6.53 ft	1,61 m 5.29 ft	1,99 m 6.53 ft	1,99 m 6.53 ft
⬆	152 Kg 335 lb	162 Kg 357 lb	178 Kg 392 lb	171 Kg 377 lb	194 Kg 428 lb	190 Kg 419 lb	207 Kg 456 lb

TORO D-Range Details

TORO MATERIAL LIFTS ARE EQUIPPED WITH TWO SAFETY SYSTEMS




Auto-brake winch with double handle.
CE Machinery Directives



Internal Pendulum Brake System (IPB)



Mast Section Unblocking System (MSU)



More mast overlap.
Prevents fishing rod effect



Adjustable manoeuvring handle with Ø200 mm wheels included.
(3 positions)



Reinforced forks included.
(Detachable). Reversible & Adjustable design.



2 Stabiliser braces for greater lift stability.



Adjustable mast blocking system for horizontal transportation.



Spirit level



Legs can be inserted in the front or back of the tower for positioning close to walls.

Folding side legs included



Adjustable legs


Compact designs and 12 wheels included for easy manoeuvring (Vertically and horizontally)



Ø150mm adjustable wheels for perfect levelling.



TORO Serie-D Specifications

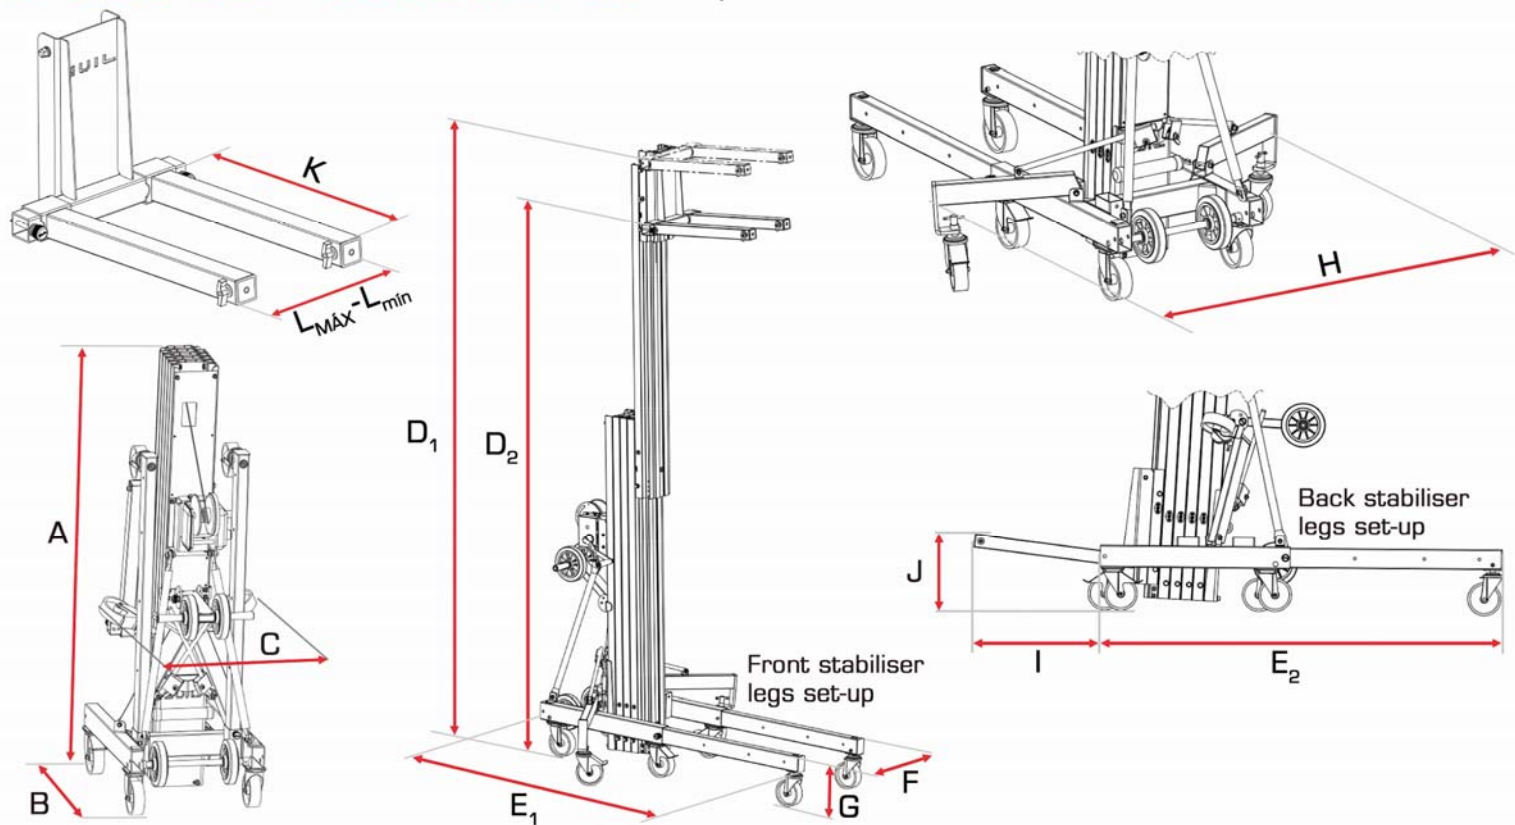

TORO D - Range		TORO D-401	TORO D-402/C	TORO D-403/C	TORO D-404	TORO D-405/C	TORO D-406	TORO D-407
STOWED								
Height (cm/ft)	A	199 / 6.5	161 / 5.3	161 / 5.3	199 / 6.5	161 / 5.3	199 / 6.5	199 / 6.5
Length (cm/ft)	B	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1	95 / 3.1
Width (cm/ft)	C	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1
WORKING MEASUREMENTS								
Maximum height (cm/ft)	Forks up	D ₁	355 / 11.7	385 / 12.6	500 / 16.4	500 / 16.4	600 / 19.7	800 / 26.2
	Forks down	D ₂	315 / 10.3	345 / 11.3	460 / 15.1	460 / 15.1	560 / 18.4	760 / 24.9
Length (cm/ft)	Front legs	E ₁	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3	192 / 6.3
	Back legs	E ₂	183 / 6	183 / 6	183 / 6	183 / 6	183 / 6	183 / 6
Width (cm/ft)		F	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1	66 / 2.1
Leg height (cm/ft)		G	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9	28 / 0.9
Width with stabilisers unfolded (cm/ft)		H	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8	147 / 4.8
Distance to the wall (cm/ft)		I	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9	57 / 1.9
Load height (cm/ft)		J	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1	33 / 1.1
FORKS								
Length (cm/in)	K	66 / 26	66 / 26	66 / 26	66 / 26	66 / 26	66 / 26	66 / 26
Maximum width (cm/in)	L _{MAX}	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7	47.5 / 18.7
Minimum width (cm/in)	L _{min}	35.5 / 14	35.5 / 14	35.5 / 14	35.5 / 14	35.5 / 14	35.5 / 14	35.5 / 14
Number of sections		2	3	4	3	5	4	5
Maximum load (Kg/lbs)		440 / 970	420 / 926	400 / 882	420 / 926	350 / 772	400 / 882	350 / 772
Weight (Kg/lbs)		152 / 335	162 / 357	178 / 392	171 / 377	192 / 423	190 / 419	207 / 456

ADAPTORS & ACCESSORIES TORO A-RANGE

HRT FORK



ACT-01 PIPE CRADLE



ACT-04 LOAD PLATFORM



ACT-06 ADAPTOR FOR ROLLER DOOR & WINDOW SHUTTERS



ACT-05 HOOK



ACT-02 FORK LENGTHENERS



ACT-07 FLOOD LIGHT ADAPTOR



ADAPTORS & ACCESSORIES TORO

HRT FORK



ACT-01 PIPE CRADLE



ACT-04 LOAD PLATFORM



ACT-06 ADAPTOR FOR ROLLER DOOR & WINDOW SHUTTERS



ACT-03 BOOM ARM



ACT-05 HOOK



ACT-02 FORK LENGTHENERS



ACT-07 FLOOD LIGHT ADAPTOR



CW-01/20

20 KG
COUNTERWEIGHT



CB-01


COUNTERWEIGHT HOLDER



Electric Lifting System for TORO Lifters (B - C - D Ranges)

Practical and very safe system that gives the option to raise and lower the TORO material lifts electrically (ranges B, C and D); converting the manual towers into electric towers.

The 'ELECTRIC' system is a very useful accessory which allows you to quickly and effortlessly raise the TORO lifters guaranteeing utmost safety at all times.

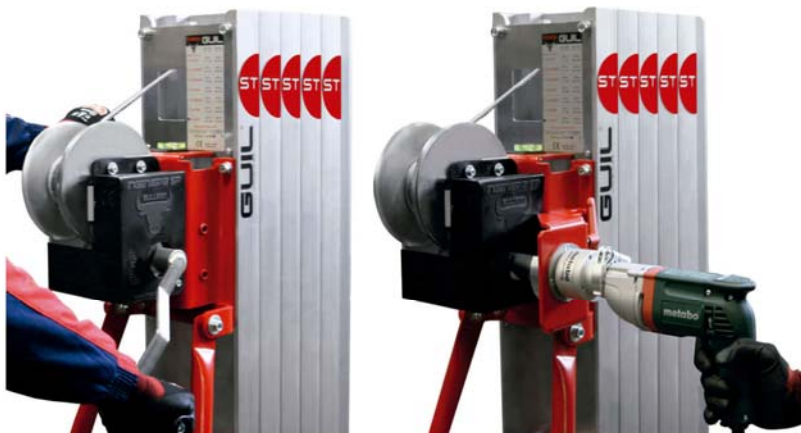

The accessory is made up of a 750W METABO drill and an adaptor to secure it to the hand winch on the lifter. The adaptor ensures a firm fix of the drill so that the user is not required to hold the drill in place. This detail not only makes it effortless to use but also prevents possible risk of bodily injuries.

The 'ELECTRIC' system is installed quickly and easily and have the following references depending on the tower it will be used with:

TORO B-Range lifters – ref. ELECTRIC B

TORO C-Range lifters – ref. ELECTRIC C

TORO D-Range lifters – ref. ELECTRIC D



NOTE: When this electric system is used the TORO D-Range towers have a maximum load capacity of 350 kg.

APPLICATIONS

GUIL manufactures a wide range of innovative material lifts, adapters and accessories designed to cover the needs for a large variety of applications:

INSTALLATIONS

- * Air conditioners
- * Electric heaters
- * Solar Panels
- * Dry wall or false ceilings
- * Electrical fixtures
- * Roller shutters or awnings
- * Ventilation systems
- * Steel girders
- * Piping
- * Barrels and metal drums

CONSTRUCTION - SIGNWORK

- * Handling construction materials
- * Handling pallets
- * Installations of electric signs
- * Big screens – Billboards

MAINTENANCE WORK

- * Hotels
- * Airports
- * Stadiums
- * Maintenance companies

STANDS & TRADE FAIRS

- * Decorating stands
- * Trade fair set-ups
- * Conventions and conferences
- * Big screens and displays
- * LCD/Plasma screen stand

MANUAL JOBS

- * Metalwork
- * Woodwork
- * Aluminium framework

