

Ezi-lift
PRODUCTS (AUST)
SALES·SERVICE·HIRE·PARTS

Call NOW
0488 888 EZI



**Specialising in all Aluminium products including
Ductlifts, Panellifts, Work Platforms and Scaffold.**

ABOUT EZI-LIFT

The EZI-LIFT product offers a strong reliable EZI to use range of equipment designed for all aspects of lifting from a few feet off the ground such as a cabinetry job or T.V installation through to jobs up to 25 feet off the ground including air-conditioning duct installation or structural beam setting. All EZI-LIFT lifts are engineered with a stowed height of under 2.0 metres so it will fit under all doorways and almost anywhere else. Sturdy 10 inch rubber wheels supported by 3 inch steel caster wheels offer exceptional manoeuvrability even in the tightest area's.

ONE TOUCH OUTRIGGERS

Simple and easy to release with the touch of a finger.



REVERSIBLE FORKS

Reinforced steel forks are easily reversed for ease of use or tricky to reach places.




DIRECTIONAL WHEEL LOCKS & INTEGRATED WHEEL BRAKES

Engineered steel casters ensure longevity in the harshest environments and include directional locks for ease of movement and integrated foot brake.



Designed for ease of use which means NO TOOLS are required for setup, use or pack up.

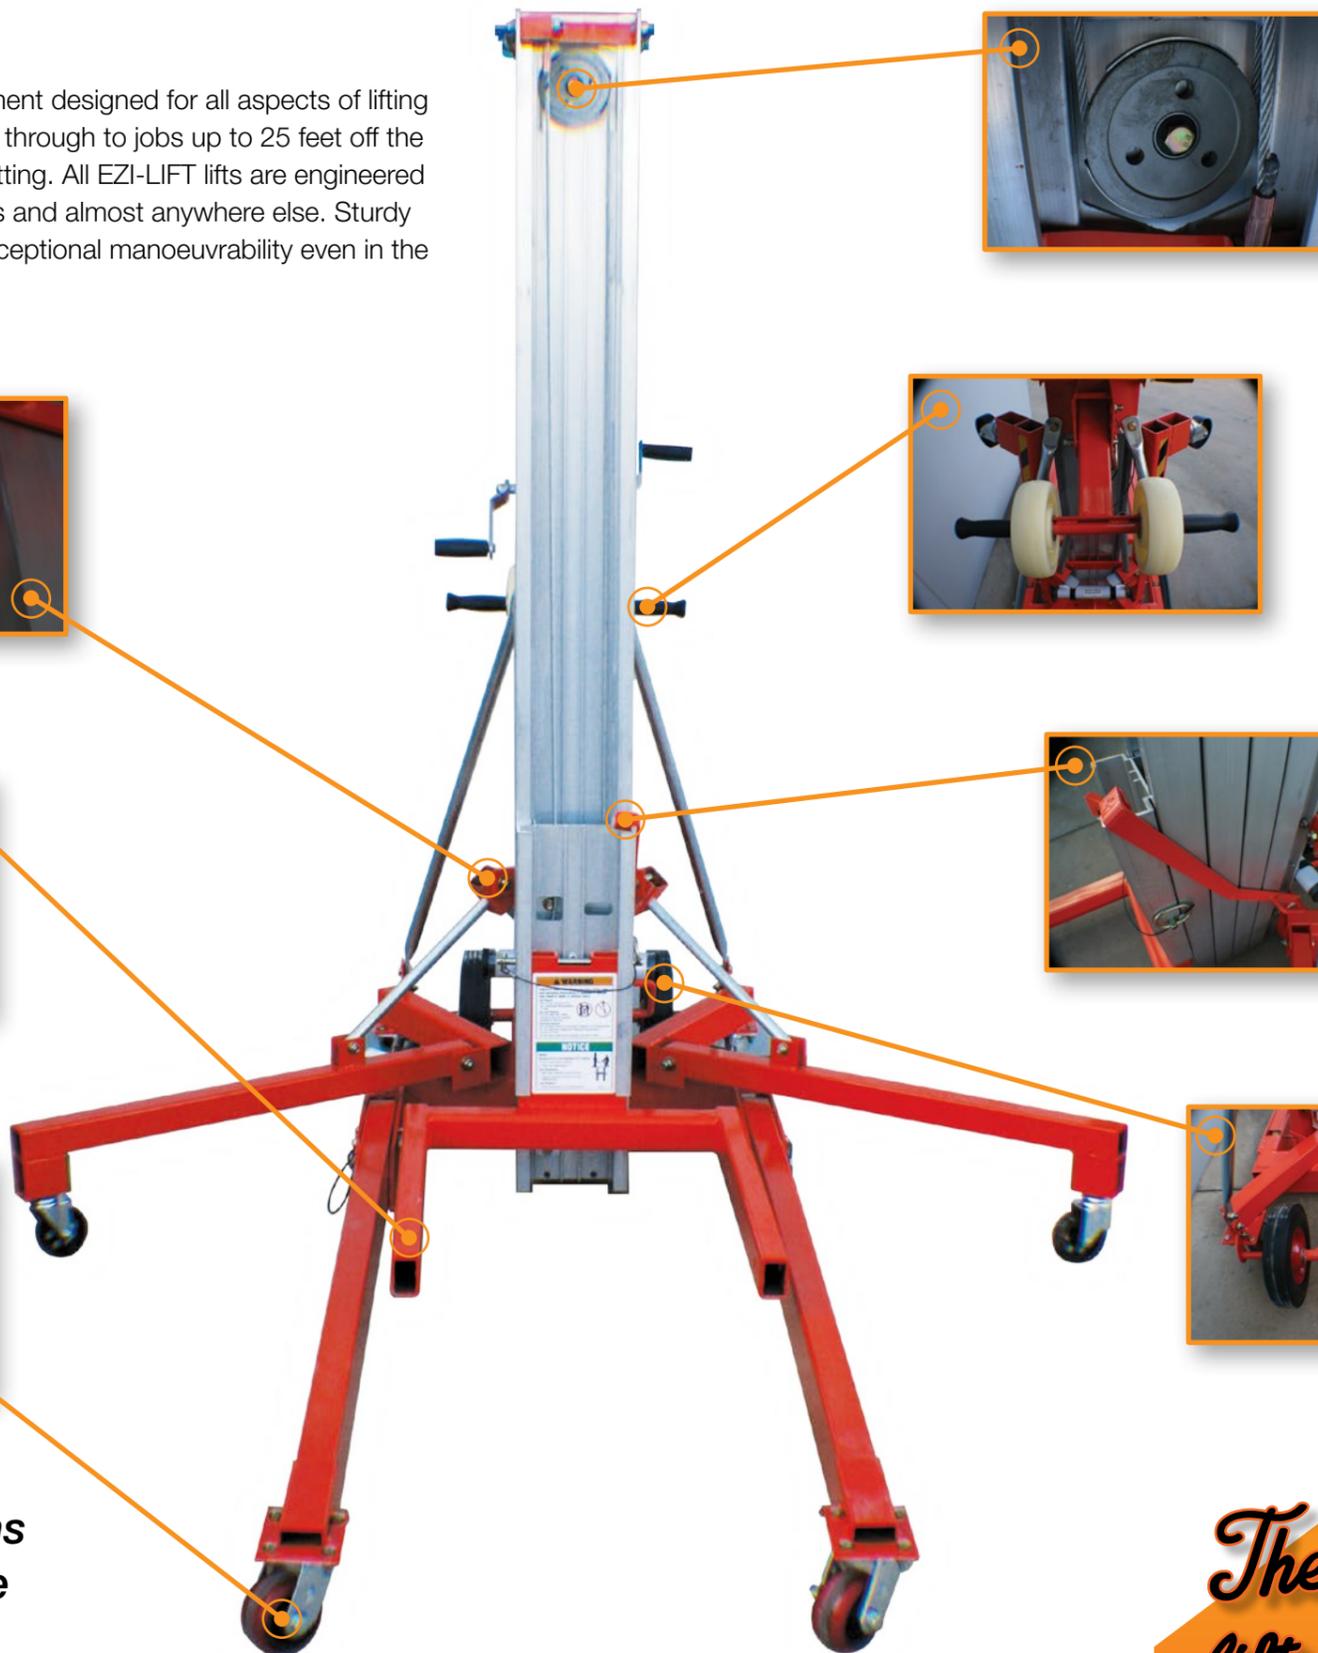

ALUMINIUM PULLEYS

Cast aluminium pulleys ensure maximum lifespan of componentry unlike cheaper plastic imitations.



LOADING WHEELS

High-density polyethylene (HDPE) wheels ensure ease of loading and unloading into vehicles whilst minimising component scratching or damage.



TRANSPORT BRAKE

Transport brake standard on all models to ensure that the EZI-LIFT works first time after transportation.



SOLID WHEELS

Large 10 inch wheels for ease of movement on all surfaces



*The **EZI** way to lift what you want, when you want!*

Specifications

| Load Handling Attachment | LGA-10 | | LGA-15 | | LGA-20 | | LGA25 | |
|---|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| | US | METRIC | US | METRIC | US | METRIC | US | METRIC |
| Height-Stowed | 78 1/2 in | 2m |
| Width / Standard Base | 31 1/2 in | 80cm |
| Width-stabilisers lowered / Standard Base | 78 5/8 in | 2m |
| Width-Min / Straddle Base | 31 1/2 in | 80cm | 31 1/2 in | 80cm | N/A | N/A | N/A | N/A |
| Width-Max / Straddle Base | 58 in | 1.5m | 31 1/2 in | 80cm | N/A | N/A | N/A | N/A |
| Length-Stowed | 29 in | 74cm | 29 in | 74cm | 29 in | 74cm | 31 in | 79cm |
| Length-Operating | 59 1/2 in | 1.5m | 72 1/2 in | 1.8m | 80 1/2 in | 2m | 80 1/2 in | 2m |
| Ground Clearance | 2 in | 50.8mm | 2 in | 50.8 | 2 in | 50.8 | 2 in | 50.8 |
| Load Capacity at 18 inch/46cm load centre | 1000 lbs | 454 kg | 800 lbs | 363 kg | 800 lbs | 363 kg | 650 lbs | 295 kg |
| Net Weight-Standard Base | 260 lbs | 117.9 kg | 317 lbs | 143.8 kg | 405 lbs | 183.7 kg | 450 lbs | 204.1 kg |
| Net Weight-Straddle Base | 303 lbs | 137.4 kg | 360 lbs | 163.3 | N/A | N/A | N/A | N/A |

| Dimension | Fork Position | LGA-10 | | LGA-15 | | LGA-20 | | LGA25 | |
|--|---------------|----------------|--------|----------------|--------|----------------|--------|--------------|--------|
| | | US | METRIC | US | METRIC | US | METRIC | US | METRIC |
| Standard Forks | Forks Down | 9 ft 9 in | 3m | 14 ft 7 1/2 in | 4.5m | 19 ft 6 in | 5.9m | 24 ft 4 in | 7.4m |
| | Forks Up | 11 ft 5 1/2 in | 3.5m | 16 ft 4 in | 5m | 21 ft 2 1/2 in | 6.5m | 26 ft 1/2 in | 7.9m |
| Adjustable Forks | Forks Down | 9 ft 9 in | 3m | 14 ft 7 1/2 in | 4.5m | 19 ft 6 in | 5.9m | 24 ft 4 in | 7.4m |
| | Forks Up | 11 ft 5 1/2 in | 3.5m | 16 ft 4 in | 5m | 21 ft 2 1/2 in | 6.5m | 26 ft 1/2 in | 7.9m |
| Flat Forks | N/A | 9 ft 9 in | 3m | 14 ft 7 1/2 in | 4.5m | N/A | N/A | N/A | N/A |
| Boom Note: Measured from ground to bottom of shackle | N/A | 10 ft 9 in | 3.3m | 15 ft 7 1/2 in | 4.8m | 20 ft 6 in | 6.2m | 24 ft 4 in | 7.4m |
| Vertical Barrel Stacker Note: Measured from ground to bottom of barrel | 30 gallon | 8 ft 10 in | 2.7m | 13 ft 9 in | 4.2m | N/A | N/A | N/A | N/A |
| | 55 gallon | 8 ft 8 in | 2.6m | 13 ft 7 in | 4.1m | N/A | N/A | N/A | N/A |
| Vertical Barrel Handler Note: Measured from ground to bottom of barrel | 55 gallon | 8 ft 8 in | 2.6m | 13 ft 7 in | 4.1m | N/A | N/A | N/A | N/A |
| | 30 gallon | 3 ft 10 in | 2.6m | 13 ft 7 in | 4.1m | N/A | N/A | N/A | N/A |
| Load Platform Note: Can be used with standard forks and adjustable forks only | Forks Down | 9 ft 9 in | 3m | 14 ft 7 1/2 in | 4.5m | 19 ft 6 in | 6m | 24 ft 4 in | 7.4m |
| | Forks Up | 11 ft 5 1/2 in | 3.5m | 16 ft 4 in | 5m | 21 ft 2 1/2 in | 6.5m | 21 ft 1/2 in | 7.9m |

Pipe Cradle Option - Handles round objects up to 30 in / 76 cm in diameter - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Non-marking fork Option - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Fork Extension Option - Adds 6 1/4 to 25 inches / 15 to 64 cm of length to forks - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Attachment Options



Platform Attachment



Pipe Rack Attachment



Fork Extension & Jib Attachment